



<b>CATEGORY</b>	LIMESTONE	<b>FORMAT/ TYPE</b>	TILE
<b>COUNTRY</b>	PORTUGAL	<b>FINISH</b>	DISTRESSED
<b>COLOR</b>	DEEP BLUE, GREY, LIGHT BEIGE, DARK BEIGE	<b>UOM</b>	SF
<b>DIMENSION</b>	<b>PART NUMBERS</b>	<b>FINISH</b>	<b>SF/PIECE</b>
8 X 16 X 5/8	LIMANTGLAGBLU0816D	DISTRESSED	0.89 SF

**APPLICATIONS**

RESIDENTIAL, COMMERCIAL

FLOORS/WALLS, INTERIOR/EXTERIOR, WET AREA (WHEN PROPERLY SEALED), NO STEAM SHOWER, NO POOLS

**Limestone Disclaimer:**

All Limestones should be cleaned and/or washed of any residue or dust on the surface of the stone prior to installation, grouting, and sealing. Allow 24-48 hours for drying prior to installation. Sealing limestone is highly recommended, please contact a professional for the most appropriate sealer for your application.

**WARNING: READ PRIOR TO INSTALLATION:**

Natural stones are products of nature and are prone to variations in color, texture, shading and veining that may differ from displays. Variations are not considered flaws as no two pieces of stone are alike, Prior to installation, ensure enough material, including waste is purchased for the entire project. Mix product from various cartons, and lay out all tiles and coordinating pieces to ensure optimal blending prior to installation. Natural stone products should be sealed prior to grouting. NO CLAIMS WILL BE ACCEPTED AFTER THE MATERIAL HAS BEEN INSTALLED



<b>CATEGORY</b>	LIMESTONE	<b>FORMAT/ TYPE</b>	TILE
<b>COUNTRY</b>	PORTUGAL	<b>FINISH</b>	DISTRESSED
<b>COLOR</b>	DEEP BLUE, GREY, LIGHT BEIGE, DARK BEIGE	<b>UOM</b>	SF
<b>DIMENSION</b>	<b>PART NUMBERS</b>	<b>FINISH</b>	<b>SF/PIECE</b>
16 X 24 X 5/8	LIMANTGLAGBLU1624D	DISTRESSED	2.67 SF

**APPLICATIONS**

RESIDENTIAL, COMMERCIAL


FLOORS/WALLS, INTERIOR/EXTERIOR, WET AREA (WHEN PROPERLY SEALED), NO STEAM SHOWER, NO POOLS

**Limestone Disclaimer:**

All Limestones should be cleaned and/or washed of any residue or dust on the surface of the stone prior to installation, grouting, and sealing. Allow 24-48 hours for drying prior to installation. Sealing limestone is highly recommended, please contact a professional for the most appropriate sealer for your application.

**WARNING: READ PRIOR TO INSTALLATION:**

Natural stones are products of nature and are prone to variations in color, texture, shading and veining that may differ from displays. Variations are not considered flaws as no two pieces of stone are alike, Prior to installation, ensure enough material, including waste is purchased for the entire project. Mix product from various cartons, and lay out all tiles and coordinating pieces to ensure optimal blending prior to installation. Natural stone products should be sealed prior to grouting. NO CLAIMS WILL BE ACCEPTED AFTER THE MATERIAL HAS BEEN INSTALLED

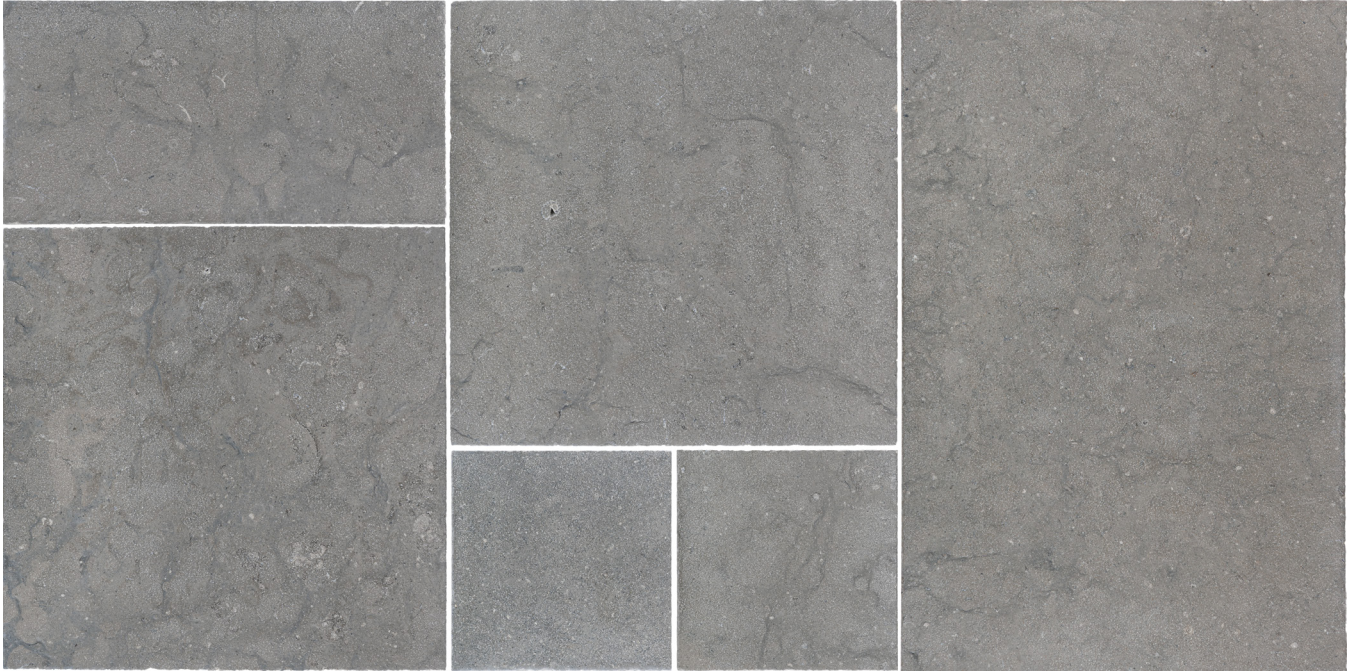

<b>CATEGORY</b>	LIMESTONE	<b>FORMAT/ TYPE</b>	TILE
<b>COUNTRY</b>	PORTUGAL	<b>FINISH</b>	DISTRESSED
<b>COLOR</b>	DEEP BLUE, GREY, LIGHT BEIGE, DARK BEIGE	<b>UOM</b>	SF

DIMENSION	PART NUMBERS	FINISH	SF/PIECE
VERSAILLES PATTERN SET	LIMANTGLAGBLUVPD	DISTRESSED	8.00 SF
(1) 16X24, (2) 16X16,			
(1) 8X16, (2) 8X8			

<b>APPLICATIONS</b>
RESIDENTIAL, COMMERCIAL
FLOORS/WALLS, INTERIOR/EXTERIOR, WET AREA (WHEN PROPERLY SEALED), NO STEAM SHOWER, NO POOLS

Limestone Disclaimer:  
All Limestones should be cleaned and/or washed of any residue or dust on the surface of the stone prior to installation, grouting, and sealing. Allow 24-48 hours for drying prior to installation. Sealing limestone is highly recommended, please contact a professional for the most appropriate sealer for your application.

WARNING: READ PRIOR TO INSTALLATION:  
Natural stones are products of nature and are prone to variations in color, texture, shading and veining that may differ from displays. Variations are not considered flaws as no two pieces of stone are alike, Prior to installation, ensure enough material, including waste is purchased for the entire project. Mix product from various cartons, and lay out all tiles and coordinating pieces to ensure optimal blending prior to installation. Natural stone products should be sealed prior to grouting. NO CLAIMS WILL BE ACCEPTED AFTER THE MATERIAL HAS BEEN INSTALLED